



NSX-AJ24 U
NSX-BL24 LH

SERVICE MANUAL

COMPACT DISC STEREO SYSTEM

BASIC TAPE MECHANISM : ZZM-3 YPR1NC
BASIC CD MECHANISM : AZG-1 ZD8RDC

- Replace this Service Manual with "Revision Publishing" when it is issued.

aiwa
S/M Code No. 09-003-426-1T1

SIMPLE
DATA

ELECTRICAL MAIN PARTS LIST - 1/7

NOTE: The characters in the suffix column indicate the part usage.

24LH		XX	A	
24U		XX	B	
REF.NO	PARTS NO.	KANRI NO.	DESCRIPTION	SUFFIX
	88-906-251-110		FF-CABLE,6P 1.25	ABCDEFGFG
	88-911-101-110		FF-CABLE,11P 1.25	ABCDEFGFG
	88-913-301-110		FF-CABLE,13P-1.25	ABCDEFGFG
PT	1	8A-NF9-612-010	PT,ANF-9 U	.B
PT	1	8A-NF9-613-010	PT,ANF-9 HR	
PT	1	8A-NF9-615-010	PT,ANF-9 LH	A
PT	1	8A-NF9-616-010	PT,ANF-9 LH-HI	E
PT	1	8A-NF9-617-010	PT,ANF-9 EZ	..CD.FG
J	401	87-A61-242-010	JACK,6.3 BLK MONO W/SW V KM	
VR	401	87-NB7-602-010	VR,RTRY 10KAX1 1 V	
C	1	87-010-387-080	CAP,E 470-25 SME	A...E
C	31	87-010-403-080	CAP,ELECT 3.3-50V	A...E
CN	1	87-A61-110-010	CONN,9P V TID-A	A...E
D	4	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	1	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	3	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	2	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	5	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	32	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	31	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
PT	2	8A-NF8-673-010	PT,SUB ANF-8(H)KAMI	A...E
Q	31	87-026-245-080	TR,DTC114ES	A...E
Q	32	87-A30-198-080	TR,KTC3199GR	A...E
RY	1	87-A91-339-010	RELAY,AC DC12V G5PA-2	A...E
S	1	87-A90-165-010	SW,SL 1-2-3 SWS2301	A...E
T	1	87-A60-317-010	TERMINAL,1P MSC	A...E
T	2	87-A60-317-010	TERMINAL,1P MSC	A...E
C	102	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	104	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	101	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	107	87-010-493-040	CAP,E 0.47-50 GAS	ABCDEFGFG
C	103	87-010-498-040	CAP,E 10-16 GAS	ABCDEFGFG
C	108	87-012-393-080	C-CAP,S 0.22-16 R K	ABCDEFGFG
C	153	87-010-198-080	CAP,CHIP 0.022	ABCDEFGFG
C	154	87-010-246-040	CAP,E 47-35 SME	ABCDEFGFG
C	155	87-010-404-040	CAP,E 4.7-50 SME	ABCDEFGFG
C	156	87-010-404-040	CAP,E 4.7-50 SME	ABCDEFGFG
C	361	87-010-178-080	CHIP CAP,1000P	ABCDEFGFG
C	362	87-010-178-080	CHIP CAP,1000P	ABCDEFGFG
C	371	87-010-178-080	CHIP CAP,1000P	ABCDEFGFG
C	372	87-010-178-080	CHIP CAP,1000P	ABCDEFGFG
C	601	87-010-382-040	CAP,E 22-25 SME	ABCDEFGFG
C	801	87-010-195-080	C-CAP,S 0.068-25 F	ABCDEFGFG
C	802	87-010-195-080	C-CAP,S 0.068-25 F	ABCDEFGFG
C	806	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	805	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	804	87-010-402-040	CAP,E 2.2-50 SME	ABCDEFGFG
C	803	87-010-402-040	CAP,E 2.2-50 SME	ABCDEFGFG
C	903	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	906	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	907	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	901	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	908	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	905	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	904	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	902	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	909	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	911	87-010-178-080	CHIP CAP,1000P	ABCDEFGFG
C	915	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	916	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	912	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	917	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	919	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGFG
C	914	87-010-248-040	CAP,E 220-10 SME	ABCDEFGFG
C	913	87-010-248-040	CAP,E 220-10 SME	ABCDEFGFG
C	910	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEFGFG
C	921	87-010-186-080	CAP,CHIP 4700P	ABCDEFGFG
C	920	87-012-369-080	C-CAP,S 0.047-50F	ABCDEFGFG
C	951	87-010-312-080	C-CAP,S 15P-50 CH	ABCDEFGFG
C	953	87-012-140-080	CAP,470P	ABCDEFGFG
C	952	87-012-155-080	C-CAP,180P-50CH	ABCDEFGFG
C	963	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGFG
C	961	87-010-378-040	CAP,E 10-16	ABCDEFGFG
C	962	87-012-157-080	C-CAP,S 330P-50 CH	ABCDEFGFG
CN	104	87-A60-057-010	CONN,11P V 9604S-11C	ABCDEFGFG
CN	701	87-099-720-010	CONN,30P TYK-B(P)	ABCDEFGFG
CN	731	87-099-015-010	CONN,13P 6216V	ABCDEFGFG
D	103	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEFGFG
D	104	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEFGFG
D	101	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEFGFG

ELECTRICAL MAIN PARTS LIST - 2/7

D	102	87-A40-752-080	ZENER,UZ6.2BSC	ABCDEF.G
D	601	87-A40-269-080	C-DIODE,MC2836	ABCDEF.G
D	653	87-A40-269-080	C-DIODE,MC2836	ABCDEF.G
D	652	87-A40-269-080	C-DIODE,MC2836	ABCDEF.G
D	651	87-A40-269-080	C-DIODE,MC2836	ABCDEF.G
D	654	87-A40-269-080	C-DIODE,MC2836	ABCDEF.G
D	703	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF.G
D	702	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF.G
D	701	87-A40-736-080	DIODE,1N4148M(SEM)G
D	732	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF.G
D	731	87-A40-736-080	DIODE,1N4148M(SEM)G
D	733	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF.G
D	981	87-A40-736-080	DIODE,1N4148M(SEM)	AB..E
D	989	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
D	986	87-A40-736-080	DIODE,1N4148M(SEM)G
D	983	87-A40-736-080	DIODE,1N4148M(SEM)	..CD.FG
D	990	87-A40-736-080	DIODE,1N4148M(SEM)	A...E
FL	901	8A-NF9-605-010	FL,HNA-10SS12	ABCDEF.G
IC	901	8A-NF9-601-110	C-IC,UPD780226GF-012-3BA	ABCDEF.
IC	901	8A-NF9-602-110	C-IC,UPD780228GF-059-3BAG
IC	961	87-A21-482-010	IC,RPM6938-H4	ABCDEF.G
L	951	87-A50-434-010	COIL,CLK 4.19M(TOKO)	ABCDEF.G
LED	209	87-A40-317-080	LED,SLR-342VCT31 RED	ABCDEF.G
LED	205	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABCDEF.G
LED	204	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABCDEF.G
LED	201	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABCDEF.G
LED	202	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABCDEF.G
LED	210	87-A40-619-040	LED,SLR-56PT-T31-W GRN	ABCDEF.G
Q	101	87-026-610-080	TR,KTC3198GR	ABCDEF.G
Q	102	87-A30-076-080	C-TR,2SC3052F	ABCDEF.G
Q	105	87-A30-468-080	C-TR,KRC102S-RTK	ABCDEF.G
Q	103	87-A30-484-080	C-TR,KRA102S	ABCDEF.G
Q	104	87-A30-484-080	C-TR,KRA102S	ABCDEF.G
Q	201	87-A30-087-080	C-FET,2SK2158	ABCDEF.G
Q	602	87-A30-318-080	TR,CSA952K	ABCDEF.G
Q	601	87-A30-318-080	TR,CSA952K	ABCDEF.G
Q	603	87-A30-329-080	TR,CD1585BC	ABCDEF.G
Q	803	87-A30-075-080	C-TR,2SA1235F	ABCDEF.G
Q	806	87-A30-075-080	C-TR,2SA1235F	ABCDEF.G
Q	805	87-A30-075-080	C-TR,2SA1235F	ABCDEF.G
Q	804	87-A30-075-080	C-TR,2SA1235F	ABCDEF.G
Q	802	87-A30-076-080	C-TR,2SC3052F	ABCDEF.G
Q	801	87-A30-076-080	C-TR,2SC3052F	ABCDEF.G
Q	902	87-A30-468-080	C-TR,KRC102S-RTK	ABCDEF.G
Q	901	87-A30-484-080	C-TR,KRA102S	ABCDEF.G
Q	951	87-A30-087-080	C-FET,2SK2158	ABCDEF.G
S	302	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	306	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	307	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	303	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	308	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	305	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	304	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	301	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	309	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	328	87-A90-164-080	SW,TACT SKQAB(N)G
S	326	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	327	87-A90-164-080	SW,TACT SKQAB(N)G
S	323	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	321	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	325	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	324	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	322	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	329	87-A90-164-080	SW,TACT SKQAB(N)G
S	343	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	347	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	348	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	341	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	349	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	345	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	342	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	344	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	346	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	350	87-A90-164-080	SW,TACT SKQAB(N)	ABCDEF.G
S	361	87-A91-633-010	SW,RTRY XRE012103PVB25FINA 1-2	ABCDEF.G
S	371	87-A91-632-010	SW,RTRY XRE012103PVB25FINB 1-2	ABCDEF.G
C	303	87-010-178-080	CHIP CAP,1000P	ABCDEF.G
C	302	87-010-178-080	CHIP CAP,1000P	ABCDEF.G
C	301	87-010-178-080	CHIP CAP,1000P	ABCDEF.G
C	304	87-010-178-080	CHIP CAP,1000P	ABCDEF.G
C	305	87-010-198-080	CAP,CHIP 0.022E
C	307	87-010-263-080	CAP,ELECT 100-10V	ABCDEF.G
C	308	87-010-263-080	CAP,ELECT 100-10V	ABCDEF.G
C	309	87-010-318-080	C-CAP,S 47P-50 CH	ABCDEF.G
C	314	87-010-187-080	CAP,CHIP S5600PE
C	313	87-010-187-080	CAP,CHIP S5600PE
C	313	87-010-188-080	CAP,CHIP 6800P	ABCD.FG

ELECTRICAL MAIN PARTS LIST - 3/7

C	314	87-010-188-080	CAP,CHIP 6800P	ABCD.FG.....
C	315	87-010-263-080	CAP,ELECT 100-10V	ABCDEF..
C	310	87-010-318-080	C-CAP,S 47P-50 CH	ABCDEF..
C	318	87-010-546-080	CAP,ELECT 0.33-50V	ABCDEF..
C	317	87-010-546-080	CAP,ELECT 0.33-50V	ABCDEF..
C	311	87-010-598-080	C-CAP,S 0.068-16VRKE.....
C	312	87-010-598-080	C-CAP,S 0.068-16VRKE.....
C	326	87-010-198-080	CAP,CHIP 0.022	ABCDEF..
C	327	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF..
C	360	87-010-401-080	CAP,ELECT 1-50V	ABCDEF..
C	399	87-012-140-080	CAP,470P	ABCDEF..
C	409	87-010-182-080	C-CAP,S 2200P-50 B	ABCDEF..
C	407	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	406	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	408	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	405	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	404	87-010-321-080	CHIP CAPACITOR,82P(J)	ABCDEF..
C	403	87-010-321-080	CHIP CAPACITOR,82P(J)	ABCDEF..
C	401	87-010-544-080	CAP,ELECT 0.1-50V	ABCDEF..
C	402	87-010-544-080	CAP,ELECT 0.1-50V	ABCDEF..
C	410	87-010-182-080	C-CAP,S 2200P-50 B	ABCDEF..
C	412	87-010-405-080	CAP,ELECT 10-50V	ABCDEF..
C	411	87-010-405-080	CAP,ELECT 10-50V	ABCDEF..
C	459	87-010-175-080	CAP,560P	..CD.FG.....
C	458	87-010-178-080	CHIP CAP,1000P	..CD.FG.....
C	455	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEF..
C	453	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEF..
C	454	87-010-183-080	C-CAP,S 2700P-50 B	ABCDEF..
C	456	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	452	87-010-382-080	CAP,ELECT 22-25V	ABCDEF..
C	460	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEF..
C	461	87-012-158-080	C-CAP,S 390P-50 CH	ABCDEF..
C	462	87-012-158-080	C-CAP,S 390P-50 CH	ABCDEF..
CN	301	87-A60-620-010	CONN,3P V 2MM JMT	ABCDEF..
CN	351	87-A60-625-010	CONN,8P V 2MM JMT	ABCDEF..
D	401	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF..
FB	303	87-008-474-080	F-BEAD,EMI BL02RN1	..CD.FG.....
IC	301	87-A21-419-040	C-IC,NJM14558MD-TE2	ABCDEF..
IC	401	87-A21-419-040	C-IC,NJM14558MD-TE2	ABCDEF..
L	451	87-007-342-010	COIL,OSC 85K BIAS	ABCDEF..
Q	306	87-A30-062-080	C-TR,KRC104S	ABCDEF..
Q	309	87-A30-075-080	C-TR,2SA1235F	ABCDEF..
Q	303	87-A30-090-080	FET,2SK2541	ABCDEF..
Q	304	87-A30-090-080	FET,2SK2541	ABCDEF..
Q	301	87-A30-091-080	FET,2SJ460	ABCDEF..
Q	308	87-A30-091-080	FET,2SJ460	ABCDEF..
Q	307	87-A30-091-080	FET,2SJ460	ABCDEF..
Q	302	87-A30-091-080	FET,2SJ460	ABCDEF..
Q	305	87-A30-091-080	FET,2SJ460	ABCDEF..
Q	310	87-A30-075-080	C-TR,2SA1235F	ABCDEF..
Q	443	87-A30-075-080	C-TR,2SA1235F	ABCDEF..
Q	444	87-A30-075-080	C-TR,2SA1235F	ABCDEF..
Q	455	87-A30-076-080	C-TR,2SC3052F	..CD.FG.....
Q	451	87-A30-318-080	TR,CSA952K	ABCDEF..
Q	454	89-333-317-880	TR,2SC3331	ABCDEF..
Q	453	89-333-317-880	TR,2SC3331	ABCDEF..
SFR	452	87-A90-432-080	SFR,30K H NVZ6TLTA	ABCDEF..
SFR	451	87-A90-432-080	SFR,30K H NVZ6TLTA	ABCDEF..
C	973	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	974	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	979	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF..
C	971	87-010-381-080	CAP,ELECT 330-16V	ABCDEF..
C	972	87-010-404-080	CAP,ELECT 4.7-50V	ABCDEF..
C	982	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEF..
C	987	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	989	87-010-197-080	CAP,CHIP 0.01 DM	..CD.FG.....
C	983	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	984	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..
C	981	87-010-260-080	CAP,ELECT 47-25V	ABCDEF..
C	985	87-010-322-080	C-CAP,S 100P-50 CH	..CD.FG.....
C	993	87-010-178-080	CHIP CAP,1000P	ABCDEF..
C	995	87-010-178-080	CHIP CAP,1000P	ABCDEF..
C	997	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEF..
C	998	87-010-260-080	CAP,ELECT 47-25V	ABCDEF..
C	992	87-010-312-080	C-CAP,S 15P-50 CH	ABCDEF..
C	991	87-010-312-080	C-CAP,S 15P-50 CH	ABCDEF..
C	999	87-A11-155-080	CAP,TC U 0.01-16 Z F	ABCDEF..
D	804	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF..
D	991	87-017-149-080	ZENER,HZS6A2L	ABCDEF..
D	992	87-A40-736-080	DIODE,1N4148M(SEM)	..CD.FG.....
IC	991	87-070-127-110	IC,LC72131D	ABCDEF..
Q	981	87-A30-234-080	TR,CSC4115BC	ABCDEF..
R	995	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF..
R	993	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF..
R	991	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF..
X	991	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABCDEF..
C	772	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF..

ELECTRICAL MAIN PARTS LIST - 4/7

C	771	87-010-263-080	CAP,ELECT 100-10V	ABCDEFGG.....
C	779	87-010-971-080	C-CAP,S 4700P-50 B J	..CD.FG.....
C	788	87-010-149-080	C-CAP,S 5P-50 CH	ABCDEFGG.....
C	786	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	785	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	784	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	782	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	783	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	780	87-010-971-080	C-CAP,S 4700P-50 B J	..CD.FG.....
C	789	87-A11-532-080	C-CAP,S 0.022-50 J B	..CD.FG.....
C	789	87-A12-052-080	C-CAP,S 0.033-25 J B	AB..E.....
C	791	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	792	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	795	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	796	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	798	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	793	87-010-404-080	CAP,ELECT 4.7-50V	ABCDEFGG.....
C	797	87-010-405-080	CAP,ELECT 10-50V	ABCDEFGG.....
C	799	87-010-407-080	CAP,ELECT 33-50V	ABCDEFGG.....
C	790	87-A11-532-080	C-CAP,S 0.022-50 J B	..CD.FG.....
C	790	87-A12-052-080	C-CAP,S 0.033-25 J B	AB..E.....
C	802	87-010-194-080	CAP,CHIP 0.047	ABCDEFGG.....
C	803	87-010-198-080	CAP,CHIP 0.022	ABCDEFGG.....
C	804	87-010-263-080	CAP,ELECT 100-10V	ABCDEFGG.....
C	807	87-010-400-080	CAP,ELECT 0.47-50V	ABCDEFGG.....
C	809	87-010-401-080	CAP,ELECT 1-50V	ABCDEFGG.....
C	808	87-010-401-080	CAP,ELECT 1-50V	ABCDEFGG.....
C	801	87-010-403-080	CAP,ELECT 3.3-50V	ABCDEFGG.....
C	800	87-012-369-080	C-CAP,S 0.047-50F	ABCDEFGG.....
C	818	87-010-180-080	C-CAP,CER 1500P	..CD.FG.....
C	810	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	814	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	816	87-010-400-080	CAP,ELECT 0.47-50V	ABCDEFGG.....
C	815	87-010-400-080	CAP,ELECT 0.47-50V	ABCDEFGG.....
C	823	87-010-177-080	C-CAP,S 820P-50 SL	AB..E.....
C	824	87-010-405-080	CAP,ELECT 10-50V	ABCDEFGG.....
C	821	87-010-405-080	CAP,ELECT 10-50V	ABCDEFGG.....
C	825	87-010-596-080	CAP,S 0.047-16	ABCDEFGG.....
C	823	87-012-349-080	C-CAP,S 1000P-50 CH	..CD.FG.....
D	801	87-A40-736-080	DIODE,1N4148M(SEM)	..CD.FG.....
D	803	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEFGG.....
IC	801	87-A21-560-010	IC,LA1844L-A	ABCDEFGG.....
L	801	87-A50-608-010	COIL,FM DET-N(TOK)	ABCDEFGG.....
L	802	87-A91-551-010	FLTR,PCFJZH-450 L(TOK)	ABCDEFGG.....
L	811	87-005-847-080	COIL,2.2UH(CECS)	ABCDEFGG.....
R	790	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	869	87-010-197-080	CAP,CHIP 0.01 DMG.....
C	875	87-010-196-080	CHIP CAPACITOR,0.1-25G.....
C	877	87-010-197-080	CAP,CHIP 0.01 DMG.....
C	879	87-010-314-080	C-CAP,S 22P-50VG.....
C	878	87-010-316-080	C-CAP,S 33P-50 CHG.....
C	874	87-010-405-080	CAP,ELECT 10-50VG.....
C	876	87-010-405-080	CAP,ELECT 10-50VG.....
C	873	87-012-140-080	CAP,470PG.....
C	872	87-012-156-080	C-CAP,S 220P-50 CHG.....
C	871	87-012-156-080	C-CAP,S 220P-50 CHG.....
IC	861	87-A20-440-040	C-IC,BU1920FSG.....
L	861	87-005-847-080	COIL,2.2UH(CECS)G.....
Q	861	87-A30-076-080	C-TR,2SC3052FG.....
Q	863	87-A30-076-080	C-TR,2SC3052FG.....
X	861	87-A70-091-010	VIB,XTAL 4.332MHZ CSA-309G.....
C	831	87-010-406-080	CAP,ELECT 22-50	..CD.FG.....
C	842	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	844	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	859	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	858	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	853	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	852	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	851	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	850	87-010-260-080	CAP,ELECT 47-25V	ABCDEFGG.....
C	860	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFGG.....
C	942	87-010-149-080	C-CAP,S 5P-50 CH	..CD.FG.....
C	940	87-010-197-080	CAP,CHIP 0.01 DM	..CD.FG.....
C	947	87-010-197-080	CAP,CHIP 0.01 DM	..CD.FG.....
C	948	87-012-140-080	CAP,470P	..CD.FG.....
C	959	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	952	87-010-197-080	CAP,CHIP 0.01 DM	..CD.FG.....
C	958	87-010-197-080	CAP,CHIP 0.01 DM	..CD.FG.....
C	957	87-010-311-080	CAP,12P	..CD.FG.....
C	961	87-010-152-080	C-CAP,S 8P-50 CH	AB..E.....
C	960	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFGG.....
C	962	87-010-401-080	CAP,ELECT 1-50V	..CD.FG.....
C	963	87-015-785-080	CHIP CAPACITOR,0.1FZ-25Z	ABCDEFGG.....
CF	832	82-785-747-010	CF MS2 GHY R	..CD.FG.....
CF	831	87-008-261-010	FILTER,SFE10.7MA5-A	AB..E.....
CF	832	87-008-261-010	FILTER,SFE10.7MA5-A	AB..E.....
CF	831	87-008-423-010	CERAMIC FILTER,SFE10.7	..CD.FG.....

ELECTRICAL MAIN PARTS LIST - 5/7

D	942	87-A40-270-080	C-DIODE,MC2838	..CD.FG
D	944	87-A40-736-080	DIODE,1N4148M(SEM)	..CD.FG
FFE	831	A8-6ZA-19C-170	6ZA-1 YFEENC	..CD.FG
FFE	831	A8-8ZA-193-070	8ZA-1 YFEUNC	AB..E
J	831	87-A60-202-010	TERMINAL,ANT 4P MSP-154V-02	AB..E
J	832	87-A60-403-010	TERMINAL,ANT PAL 2P HSP-312V05	..CD.FG
L	832	87-005-847-080	COIL,2.2UH(CECS)	ABCDEF
L	942	87-A50-019-010	COIL,OSC LW(COI)	..CD.FG
L	941	87-A50-020-010	COIL,ANT LW(COI)	..CD.FG
L	951	8A-NF8-667-010	COIL,AM PACK 4(TOK)	AB..E
L	951	8A-NF8-668-010	COIL,AM PACK 2(TOK)	..CD.FG
Q	836	87-A30-072-080	C-TR,RT1P144C	ABCDEF
Q	835	89-327-143-080	TR,2SC2714	ABCDEF
Q	948	87-A30-086-040	C-TR,CSD1306E	..CD.FG
Q	951	87-A30-074-080	C-TR,RT1P141C	..CD.FG
Q	952	87-A30-086-040	C-TR,CSD1306E	..CD.FG
Q	953	89-503-602-080	C-FET,2SK360E	..CD.FG
TC	942	87-011-253-080	TRIMER,30P LAR	..CD.FG
C	3	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	6	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	5	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	4	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	9	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	10	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	11	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	12	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEF
C	19	87-A10-627-000	CAP,E 2200-50 M SMG	..CD.FG
C	19	87-A12-036-000	CAP,E 2200-63 SMG	AB..E
C	26	87-010-247-080	CAP,ELECT 100-50V	ABCDEF
C	25	87-010-385-080	CAP,ELECT 220-25V	ABCDEF
C	21	87-016-495-000	CAP,E 3300-25 M SMG	.B.....
C	22	87-016-495-000	CAP,E 3300-25 M SMG	.B.....
C	21	87-A10-520-000	CAP,E 3300-35 M SMG	A.CDEF
C	22	87-A10-520-000	CAP,E 3300-35 M SMG	A.CDEF
C	20	87-A10-627-000	CAP,E 2200-50 M SMG	..CD.FG
C	20	87-A12-036-000	CAP,E 2200-63 SMG	AB..E
C	38	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF
C	32	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF
C	34	87-010-247-080	CAP,ELECT 100-50V	ABCDEF
C	31	87-010-263-080	CAP,ELECT 100-10V	ABCDEF
C	33	87-010-263-080	CAP,ELECT 100-10V	.B.....
C	35	87-010-380-080	CAP,ELECT 47-16V	ABCDEF
C	36	87-010-381-080	CAP,ELECT 330-16V	ABCDEF
C	30	87-010-430-080	CAP,ELECT 100-63	ABCDEF
C	61	87-010-260-080	CAP,ELECT 47-25V	ABCDEF
C	60	87-010-403-080	CAP,ELECT 3.3-50V	ABCDEF
C	97	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEF
C	99	87-010-196-080	CHIP CAPACITOR,0.1-25	..CD.FG
CNA	1	8A-NF8-653-010	CONN ASSY,9P TID-A(480)	A...E
D	7	87-A40-393-090	DIODE,1N5402GW(F20)	.B.....
D	6	87-A40-393-090	DIODE,1N5402GW(F20)	.B.....
D	5	87-A40-393-090	DIODE,1N5402GW(F20)	.B.....
D	8	87-A40-393-090	DIODE,1N5402GW(F20)	.B.....
D	17	87-A40-455-090	DIODE,RL203 GW	A...E
D	18	87-A40-455-090	DIODE,RL203 GW	A...E
D	14	87-A40-455-090	DIODE,RL203 GW	.B..E
D	13	87-A40-455-090	DIODE,RL203 GW	.B..E
D	15	87-A40-455-090	DIODE,RL203 GW	.B..E
D	19	87-A40-455-090	DIODE,RL203 GW	A...E
D	16	87-A40-455-090	DIODE,RL203 GW	.B..E
D	13	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	15	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	14	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	16	87-A40-535-080	DIODE,1N5393-GOODARK	A.....
D	19	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	15	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	13	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	17	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	16	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	18	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	14	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	20	87-A40-455-090	DIODE,RL203 GW	A...E
D	27	87-A40-553-080	DIODE,1N4003 LES	ABCDEF
D	26	87-A40-553-080	DIODE,1N4003 LES	ABCDEF
D	20	87-A40-553-080	DIODE,1N4003 LES	..CD.FG
D	29	87-A40-776-080	ZENER,UZ27BSD	ABCDEF
D	33	87-A40-553-080	DIODE,1N4003 LES	ABCDEF
D	35	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF
D	30	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF
D	34	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF
D	31	87-A40-764-080	ZENER,UZ10BSC	ABCDEF
D	64	87-A40-269-080	C-DIODE,MC2836	ABCDEF
D	63	87-A40-270-080	C-DIODE,MC2838	ABCDEF
D	62	87-A40-313-080	C-DIODE,MC 2840	ABCDEF
D	61	87-A40-313-080	C-DIODE,MC 2840	ABCDEF
D	65	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF
D	60	87-A40-736-080	DIODE,1N4148M(SEM)	ABCDEF

ELECTRICAL MAIN PARTS LIST - 6/7

D	66	87-A40-854-080	ZENER,UZ15BSA	ABCDEF
D	71	87-A40-313-080	C-DIODE,MC 2840	ABCDEF
D	72	87-A40-313-080	C-DIODE,MC 2840	ABCDEF
D	76	87-A40-313-080	C-DIODE,MC 2840	ABCDEF
Q	1	87-026-609-080	TR,KTA1266GR	ABCDEF
Q	9	87-026-609-080	TR,KTA1266GR	ABCDEF
Q	2	87-026-609-080	TR,KTA1266GR	ABCDEF
Q	5	87-026-610-080	TR,KTC3198GR	ABCDEF
Q	8	87-A30-075-080	C-TR,2SA1235F	ABCDEF
Q	7	87-A30-075-080	C-TR,2SA1235F	.B
Q	6	87-A30-076-080	C-TR,2SC3052F	ABCDEF
Q	4	89-213-702-010	TR,2SB1370E
Q	3	89-213-702-010	TR,2SB1370	ABCDEF
Q	10	87-A30-076-080	C-TR,2SC3052F	ABCDEF
Q	61	87-A30-075-080	C-TR,2SA1235F	ABCDEF
Q	63	87-A30-075-080	C-TR,2SA1235F	ABCDEF
Q	65	87-A30-075-080	C-TR,2SA1235F	ABCDEF
Q	62	87-A30-076-080	C-TR,2SC3052F	ABCDEF
Q	64	87-A30-076-080	C-TR,2SC3052F	ABCDEF
Q	60	87-A30-076-080	C-TR,2SC3052F	ABCDEF
W	99	8A-NF9-609-010	F-CABLE,9P 2.5 480MM	.BCD.FG
W	99	8A-NF9-609-010	F-CABLE,9P 2.5 480MM	.BCD.FG
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCDEF
WH	1	87-A90-510-010	HLDR,WIRE 2.5-9P	ABCDEF
C	606	87-010-179-080	CAP,CHIP S B1200P	A.CD.FG
C	605	87-010-179-080	CAP,CHIP S B1200P	A.CD.FG
C	605	87-010-184-080	CHIP CAPACITOR,3300P(K)	.B..E
C	606	87-010-184-080	CHIP CAPACITOR,3300P(K)	.B..E
C	609	87-010-213-080	C-CAP,S 0.015-50 B	ABCDEF
C	615	87-010-154-080	CAP,CHIP 10P	ABCDEF
C	610	87-010-213-080	C-CAP,S 0.015-50 B	ABCDEF
C	617	87-010-221-080	CAP,ELECT 470-10V	ABCDEF
C	616	87-010-221-080	CAP,ELECT 470-10V	ABCDEF
C	618	87-010-405-080	CAP,ELECT 10-50V	ABCDEF
C	614	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	613	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	612	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	611	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	632	87-010-185-080	C-CAP,S 3900P-50 B	ABCDEF
C	631	87-010-185-080	C-CAP,S 3900P-50 B	ABCDEF
C	634	87-016-369-080	C-CAP,S 0.033-25 B K	ABCDEF
C	633	87-016-369-080	C-CAP,S 0.033-25 B K	ABCDEF
C	630	87-016-669-080	C-CAP,S 0.1-25 K B	ABCDEF
C	669	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF
C	677	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEF
C	670	87-010-322-080	C-CAP,S 100P-50 CH	ABCDEF
CN	601	87-099-719-010	CONN,30P TYK-B(X)	ABCDEF
CN	602	87-A60-131-010	CONN,6P V FE	ABCDEF
D	601	87-A40-739-080	ZENER,UZ2.7BSA	ABCDEF
D	602	87-A40-739-080	ZENER,UZ2.7BSA	ABCDEF
IC	601	87-A21-401-040	C-IC,M61503FP	ABCDEF
J	602	87-A60-881-010	JACK,PIN 2P MSP 242V05 PBSN	ABCDEF
Q	607	87-A30-076-080	C-TR,2SC3052F	ABCDEF
Q	605	87-A30-090-080	FET,2SK2541	ABCDEF
Q	606	87-A30-090-080	FET,2SK2541	ABCDEF
R	654	87-A11-144-080	CAP,TC U 0.1-50 K B	ABCDEF
R	653	87-A11-144-080	CAP,TC U 0.1-50 K B	ABCDEF
C	183	87-010-387-080	CAP,E 470-25 SME	.BCD.FG
C	184	87-010-403-080	CAP,ELECT 3.3-50V	.BCD.FG
C	185	87-A11-148-080	CAP,TC U 0.1-50 Z F	..CD.FG
D	183	87-A40-269-080	C-DIODE,MC2836	.BCD.FG
D	182	87-A40-270-080	C-DIODE,MC2838	.BCD.FG
D	181	87-A40-270-080	C-DIODE,MC2838	.BCD.FG
PT	181	8A-NF8-661-010	PT,SUB ANF-8(U)	.B
PT	181	8A-NF8-662-010	PT,SUB ANF-8(E)	..CD.FG
Q	182	87-026-235-080	C-TR,DTC114EK	.BCD.FG
Q	181	87-A30-076-080	C-TR,2SC3052F	.BCD.FG
RY	181	87-A91-418-010	RELAY,AC12V G5PA-1-M	.BCD.FG
T	181	87-A60-317-010	TERMINAL,1P MSC	.BCD.FG
T	182	87-A60-317-010	TERMINAL,1P MSC	.BCD.FG
WH	181	87-A90-510-010	HLDR,WIRE 2.5-9P	.BCD.FG
WH	181	87-A90-510-010	HLDR,WIRE 2.5-9P	.BCD.FG
C	101	87-010-185-080	C-CAP,S 3900P-50 B	ABCDEF
C	102	87-010-185-080	C-CAP,S 3900P-50 B	ABCDEF
C	106	87-010-187-080	CAP,CHIP S5600P	ABCDEF
C	105	87-010-187-080	CAP,CHIP S5600P	ABCDEF
C	109	87-010-322-080	C-CAP,S 100P-50 CH	..CD.FG
C	108	87-010-404-080	CAP,ELECT 4.7-50V	ABCDEF
C	107	87-010-404-080	CAP,ELECT 4.7-50V	ABCDEF
C	104	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	103	87-010-545-080	CAP,ELECT 0.22-50V	ABCDEF
C	119	87-010-197-080	CAP,CHIP 0.01 DM	A.CD.FG
C	110	87-010-322-080	C-CAP,S 100P-50 CH	..CD.FG
C	111	87-010-391-080	CAP,E 10-35 SME	ABCDEF
C	112	87-010-391-080	CAP,E 10-35 SME	ABCDEF
C	113	87-010-405-080	CAP,ELECT 10-50V	A.CD.FG
C	114	87-010-405-080	CAP,ELECT 10-50V	A.CD.FG

ELECTRICAL MAIN PARTS LIST - 7/7

C	113	87-010-866-080	CAP,ELECT 10-63	.B..E.....
C	114	87-010-866-080	CAP,ELECT 10-63	.B..E.....
C	119	87-012-369-080	C-CAP,S 0.047-50F	.B.....
C	119	87-016-369-080	C-CAP,S 0.033-25 B K	...E.....
C	123	87-010-176-080	C-CAP,S 680P-50 SL	..CD.FG.....
C	124	87-010-176-080	C-CAP,S 680P-50 SL	..CD.FG.....
C	129	87-010-191-080	C-CAP,S 0.015-50 F	ABCDEFG.....
C	120	87-010-197-080	CAP,CHIP 0.01 DM	A.CD.FG.....
C	125	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEFG.....
C	127	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEFG.....
C	126	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEFG.....
C	128	87-012-368-080	C-CAP,S 0.1-50 F	ABCDEFG.....
C	120	87-012-369-080	C-CAP,S 0.047-50F	.B.....
C	120	87-016-369-080	C-CAP,S 0.033-25 B K	...E.....
C	133	87-010-186-080	CAP,CHIP 4700P	ABCDEFG.....
C	130	87-010-191-080	C-CAP,S 0.015-50 F	ABCDEFG.....
C	131	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFG.....
C	132	87-010-197-080	CAP,CHIP 0.01 DM	ABCDEFG.....
C	140	87-010-182-080	C-CAP,S 2200P-50 B	ABCDEFG.....
C	141	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFG.....
D	101	87-A40-269-080	C-DIODE,MC2836	ABCDEFG.....
D	109	87-A40-270-080	C-DIODE,MC2838	.B.....
D	116	87-A40-270-080	C-DIODE,MC2838	ABCDEFG.....
IC	101	87-A21-396-010	IC,STK490-040	...CD.FG.....
IC	101	87-A21-397-010	IC,STK490-070	AB..E.....
IC	101	87-A21-398-010	IC,STK490-110	ABCDEFG.....
J	203	87-A60-238-010	TERMINAL,SP 4P (MSC)	ABCDEFG.....
J	202	87-A60-488-010	JACK,DIA6.3 BLK ST W/SW KM16AT	ABCDEFG.....
L	101	87-A50-610-010	COIL,1UH K(MDEC)	ABCDEFG.....
L	102	87-A50-610-010	COIL,1UH K(MDEC)	ABCDEFG.....
Q	123	87-A30-107-070	C-TR,CMBT5401	ABCDEFG.....
Q	124	87-A30-107-070	C-TR,CMBT5401	ABCDEFG.....
Q	126	87-A30-107-070	C-TR,CMBT5401	ABCDEFG.....
Q	130	87-A30-106-040	C-TR,CMBT5551	ABCDEFG.....
R	129	87-A00-669-080	RES,M/F 0.22-2W J RA	.B..E.....
R	132	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	131	87-A00-257-080	RES,M/F 0.15-1W J	A.....
R	131	87-A00-258-080	RES,M/F 0.22-1W J	..CD.FG.....
R	132	87-A00-258-080	RES,M/F 0.22-1W J	..CD.FG.....
R	131	87-A00-669-080	RES,M/F 0.22-2W J RA	.B..E.....
R	130	87-A00-669-080	RES,M/F 0.22-2W J RA	.B..E.....
R	132	87-A00-669-080	RES,M/F 0.22-2W J RA	.B..E.....
R	143	87-A00-440-050	RES,220-1/2W J RP	ABCDEFG.....
R	146	87-A00-440-050	RES,220-1/2W J RP	ABCDEFG.....
R	145	87-A00-440-050	RES,220-1/2W J RP	ABCDEFG.....
R	144	87-A00-440-050	RES,220-1/2W J RP	ABCDEFG.....
C	239	87-010-196-080	CHIP CAPACITOR,0.1-25	ABCDEFG.....
C	235	87-010-408-080	CAP,ELECT 47-50V	.B.....
C	236	87-010-408-080	CAP,ELECT 47-50V	.B.....
J	205	87-A60-881-010	JACK,PIN 2P MSP 242V05 PBSN	.B.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

24LHXX.....	A.....		
24UXX.....	B.....		
	KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	87-B00-002-010		BADGE,AIWA 30 ABS SIL	ABCDEFG.....
	87-CE3-023-010		BADGE,AIWA 30N SILV
	8A-NF0-001-010		CABI,FR U	.B.....
	8A-NF0-003-010		BOX,CASS 1	ABCDEFG.....
	8A-NF0-004-010		BOX,CASS 2	ABCDEFG.....
	8A-NF0-014-010		PANEL,TRAY	ABCDEFG.....
	8A-NF0-026-010		CABI,FR LH 24	A.CD.....
	8A-NF0-027-010		CABI,FR LH 34E.....
	8A-NF0-029-010		CABI,FR EZ 28F.....
	8A-NF0-030-010		CABI,FR EZR26G.....
	8A-NF0-031-010		CABI,FR EZR29
	8A-NF0-032-010		CABI,FR HS
	8A-NF0-039-010		CABI,FR HASC1M 24E
	8A-NF0-040-010		CABI,FR LHSC3M 24J
	8A-NF0-056-010		LENS,REMOCON	ABCDEFG.....
	8A-NF0-061-010		CABI,REAR USC	.B.....
	8A-NF0-062-010		CABI,REAR LHSC 24	A.....
	8A-NF0-063-010		CABI,REAR LHSC 34E.....
	8A-NF0-064-010		CABI,REAR KSC	..C.....
	8A-NF0-065-010		CABI,REAR EZSC 24	...D.....
	8A-NF0-066-010		CABI,REAR EZSC 26RG.....
	8A-NF0-067-010		CABI,REAR EZSC 28F.....
	8A-NF0-068-010		CABI,REAR EZSC 29R
	8A-NF0-070-010		CABI,REAR HS
	8A-NF0-071-010		CABI,REAR KSC 28
	8A-NF8-005-010		PANEL,TOP	ABCDEFG.....
	8A-NF8-007-010		PANEL,LEFT V-2	ABCDEFG.....
	8A-NF8-008-010		PANEL,RIGHT V-2	ABCDEFG.....
	8A-NFX-005-010		CABI,REAR LH W/O SPEC
	8A-NF0-008-010		KEY,POWER	ABCDEFG.....
	8A-NF0-009-010		KEY,FUN	ABCDEFG.....
	8A-NF0-010-010		KEY,ASSY OPE 1 WAY	ABCDEFG.....
	8A-NF0-016-010		KNOB,RTRY VOL	ABCDEFG.....
	8A-NF0-018-010		KEY,SYNC	ABCDEF.....
	8A-NF0-019-010		KEY,CD	ABCDEFG.....
	8A-NF0-021-010		REFLECTOR,ECO	ABCDEFG.....
	8A-NF0-025-010		KEY,ENTER	ABCDEFG.....
	8A-NF0-048-010		KEY,RDSG.....
	8A-NF9-015-010		KNOB,RTRY MIC
	81-532-080-010		LABEL, CASS. COMPT	ABCDEFG.....
	8A-NF0-005-010		WINDOW,DISP U	ABCDEFG.....
	8A-NF0-006-010		WINDOW,CASS 1	ABCDEFG.....
	8A-NF0-007-010		WINDOW,CASS 2	ABCDEFG.....
	8A-NF0-038-010		WINDOW,CD	ABCDEFG.....
	8A-NF8-006-010		WINDOW,TOP	ABCDEFG.....
	84-ZG1-245-210		CAP,OPTICAL	ABCDEFG.....
	82-NF5-229-010		PLATE,LOCK	ABCDEFG.....
	86-NF6-211-010		HLDR,IC T1.6	.B..E.....
	86-NF9-224-010		SPR-C,LOCK	ABCDEFG.....
	87-064-080-010		WIRE, BINDER	ABCDEFG.....
	87-NF4-216-010		HLDR,LOCK 1	ABCDEFG.....
	87-NF4-217-110		HLDR,LOCK 2	ABCDEFG.....
	87-NF4-221-010		HLDR,CABLE	ABCDEFG.....
	8A-NF8-205-010		HLDR,IC	A.CD.FG.....
	8A-NF8-206-010		HLDR,PWB M	ABCDEFG.....
	8A-NF8-207-010		SPR-T,EJECT 1	ABCDEFG.....
	8A-NF8-208-010		SPR-T,EJECT 2	ABCDEFG.....
	8A-NF8-209-010		OIL-DMPR,120	ABCDEFG.....
	8A-NF9-211-010		HLDR,PWB PT HI	ABCDEFG.....
	8Z-NB8-240-010		COVER, PL	ABCDEFG.....
	87-067-581-010		TAPPING SCREW, BVT2+3-15	ABCDEFG.....
	87-067-641-010		UTT2+3-8(W/O SLOT)BL	ABCDEFG.....
	87-067-689-010		TAPPING SCREW, BVTT+3-8	ABCDEFG.....
	87-067-703-010		TAPPING SCREW, BVT2+3-10	ABCDEFG.....
	87-078-191-010		S-SCREW,IT+4-10	ABCDEFG.....
	87-721-096-410		QT2+3-10 GLD	ABCDEFG.....
	87-721-097-410		QT2+3-12 GLD	ABCDEFG.....
	87-723-096-410		QT2+3-10W/O SLOT BL	ABCDEFG.....
	87-NF4-224-010		S-SCREW,IT3B+3-8 CU	ABCDEFG.....
	87-067-581-010		TAPPING SCREW, BVT2+3-15
	87-067-641-010		UTT2+3-8(W/O SLOT)BL
	87-067-689-010		TAPPING SCREW, BVTT+3-8
	87-067-703-010		TAPPING SCREW, BVT2+3-10
	87-721-096-410		QT2+3-10 GLD
	87-721-097-410		QT2+3-12 GLD
	87-723-096-410		QT2+3-10W/O SLOT BL
	82-NF7-210-110		GUIDE,FL (*)	ABCDEFG.....
	8A-NF0-201-010		GUIDE,OPE 1 WAY	ABCDEFG.....
	87-085-185-010		BUSHING, AC CORD (E)	A.CDEFG.....
	87-099-811-010		PLUG,ADPTR CONV(K)	..C.....

MECHANICAL PARTS LIST - 2/2


		87-A91-422-010	BUSHING,AC CORD(U)	.B.....
W	1	87-A80-092-010	AC CORD ASSY,E BLK SUN FAI	A..DEFG.....
W	1	87-A80-105-010	AC CORD ASSY,AZ
W	1	87-A80-110-010	AC CORD ASSY,U SPT-2W	.B.....
W	1	87-A80-143-010	AC CORD ASSY,E BLK	..C.....
W	1	87-A80-155-010	AC CORD ASSY,HS TS

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

24LHXX.....	A.....		
24UXX.....	B.....		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-NF0-902-010	IB,LH(ESP)FM-BL24/BL34	A...E.....	
	8A-NF0-903-010	IB,U(ESF)FM-AJ24	.B.....	
	8A-NF0-905-010	IB,K(E)FM-BL24	..C.....	
	8A-NF0-906-010	IB,EZ(9L)FM-BL24	...D.....	
	8A-NF0-915-010	IB,K(E)FM-BL28(3D)	
	8A-NF0-916-010	IB,EZ(9L)FM-BL26(RDS)G.....	
	8A-NF0-926-010	IB,EZ(9L)FM-BL28(3D)F.....	
	8A-NF0-927-010	IB,EZ(9L)FM-BL29(R3D)	
	8A-NF0-921-010	IB,HA(S)NEA-BL24E	
	8A-NF0-922-010	IB,LH(P)CCE-BL24J	
	87-006-225-010	AM LOOP ANT NC2	..CD.FG.....	
	87-043-106-010	WIRE,FM ANT(Z)	AB..E.....	
	87-043-115-010	ANT,FEEDER FM	ABCDEFG.....	
	87-A90-030-010	ANT,LOOP AM-NC C	ABCDEF.....	
	87-A91-017-010	PLUG,CONVERSION JT-0476	A...E.....	
	8Z-NF9-701-210	RC UNIT,ZAS02	
	8Z-NF9-702-010	RC UNIT,ZAS02	ABCDEF.....	


SCHEMATIC DIAGRAM – 1 (MAIN : 1/2) <AMP / DECK SECTION>

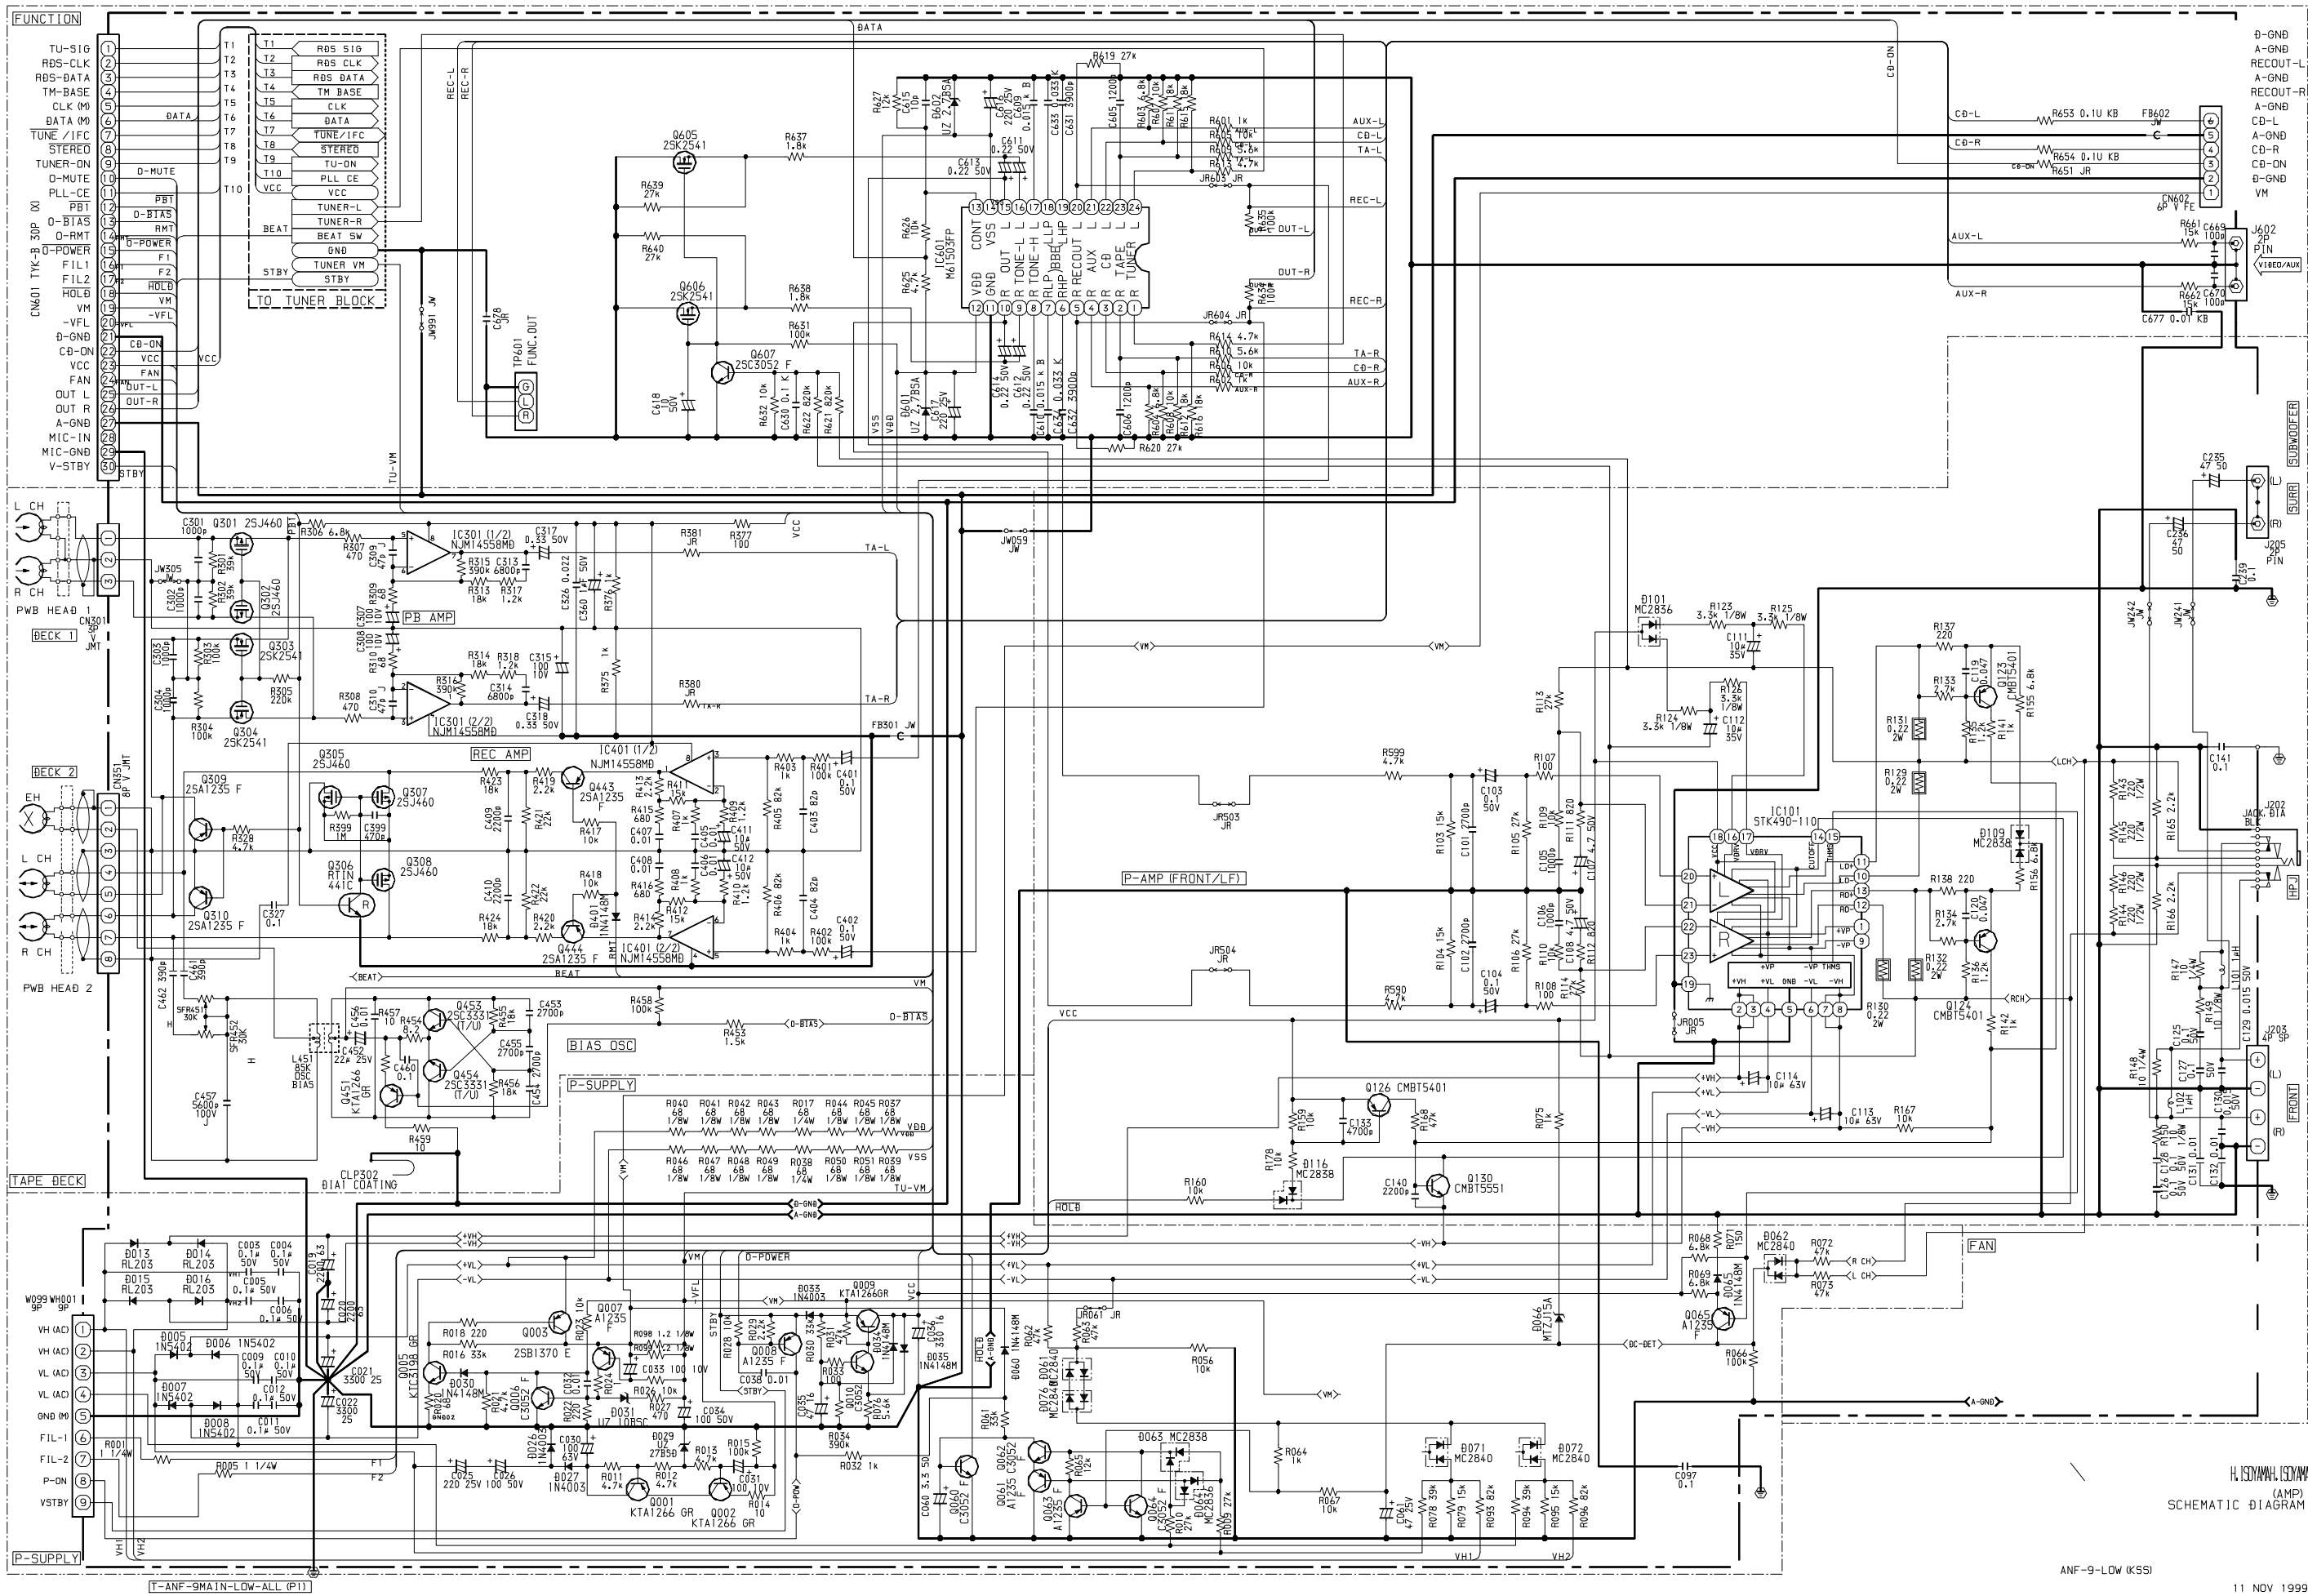

[illegible]

04 NOV 1999

SCHEMATIC DIAGRAM – 3 (FRONT)

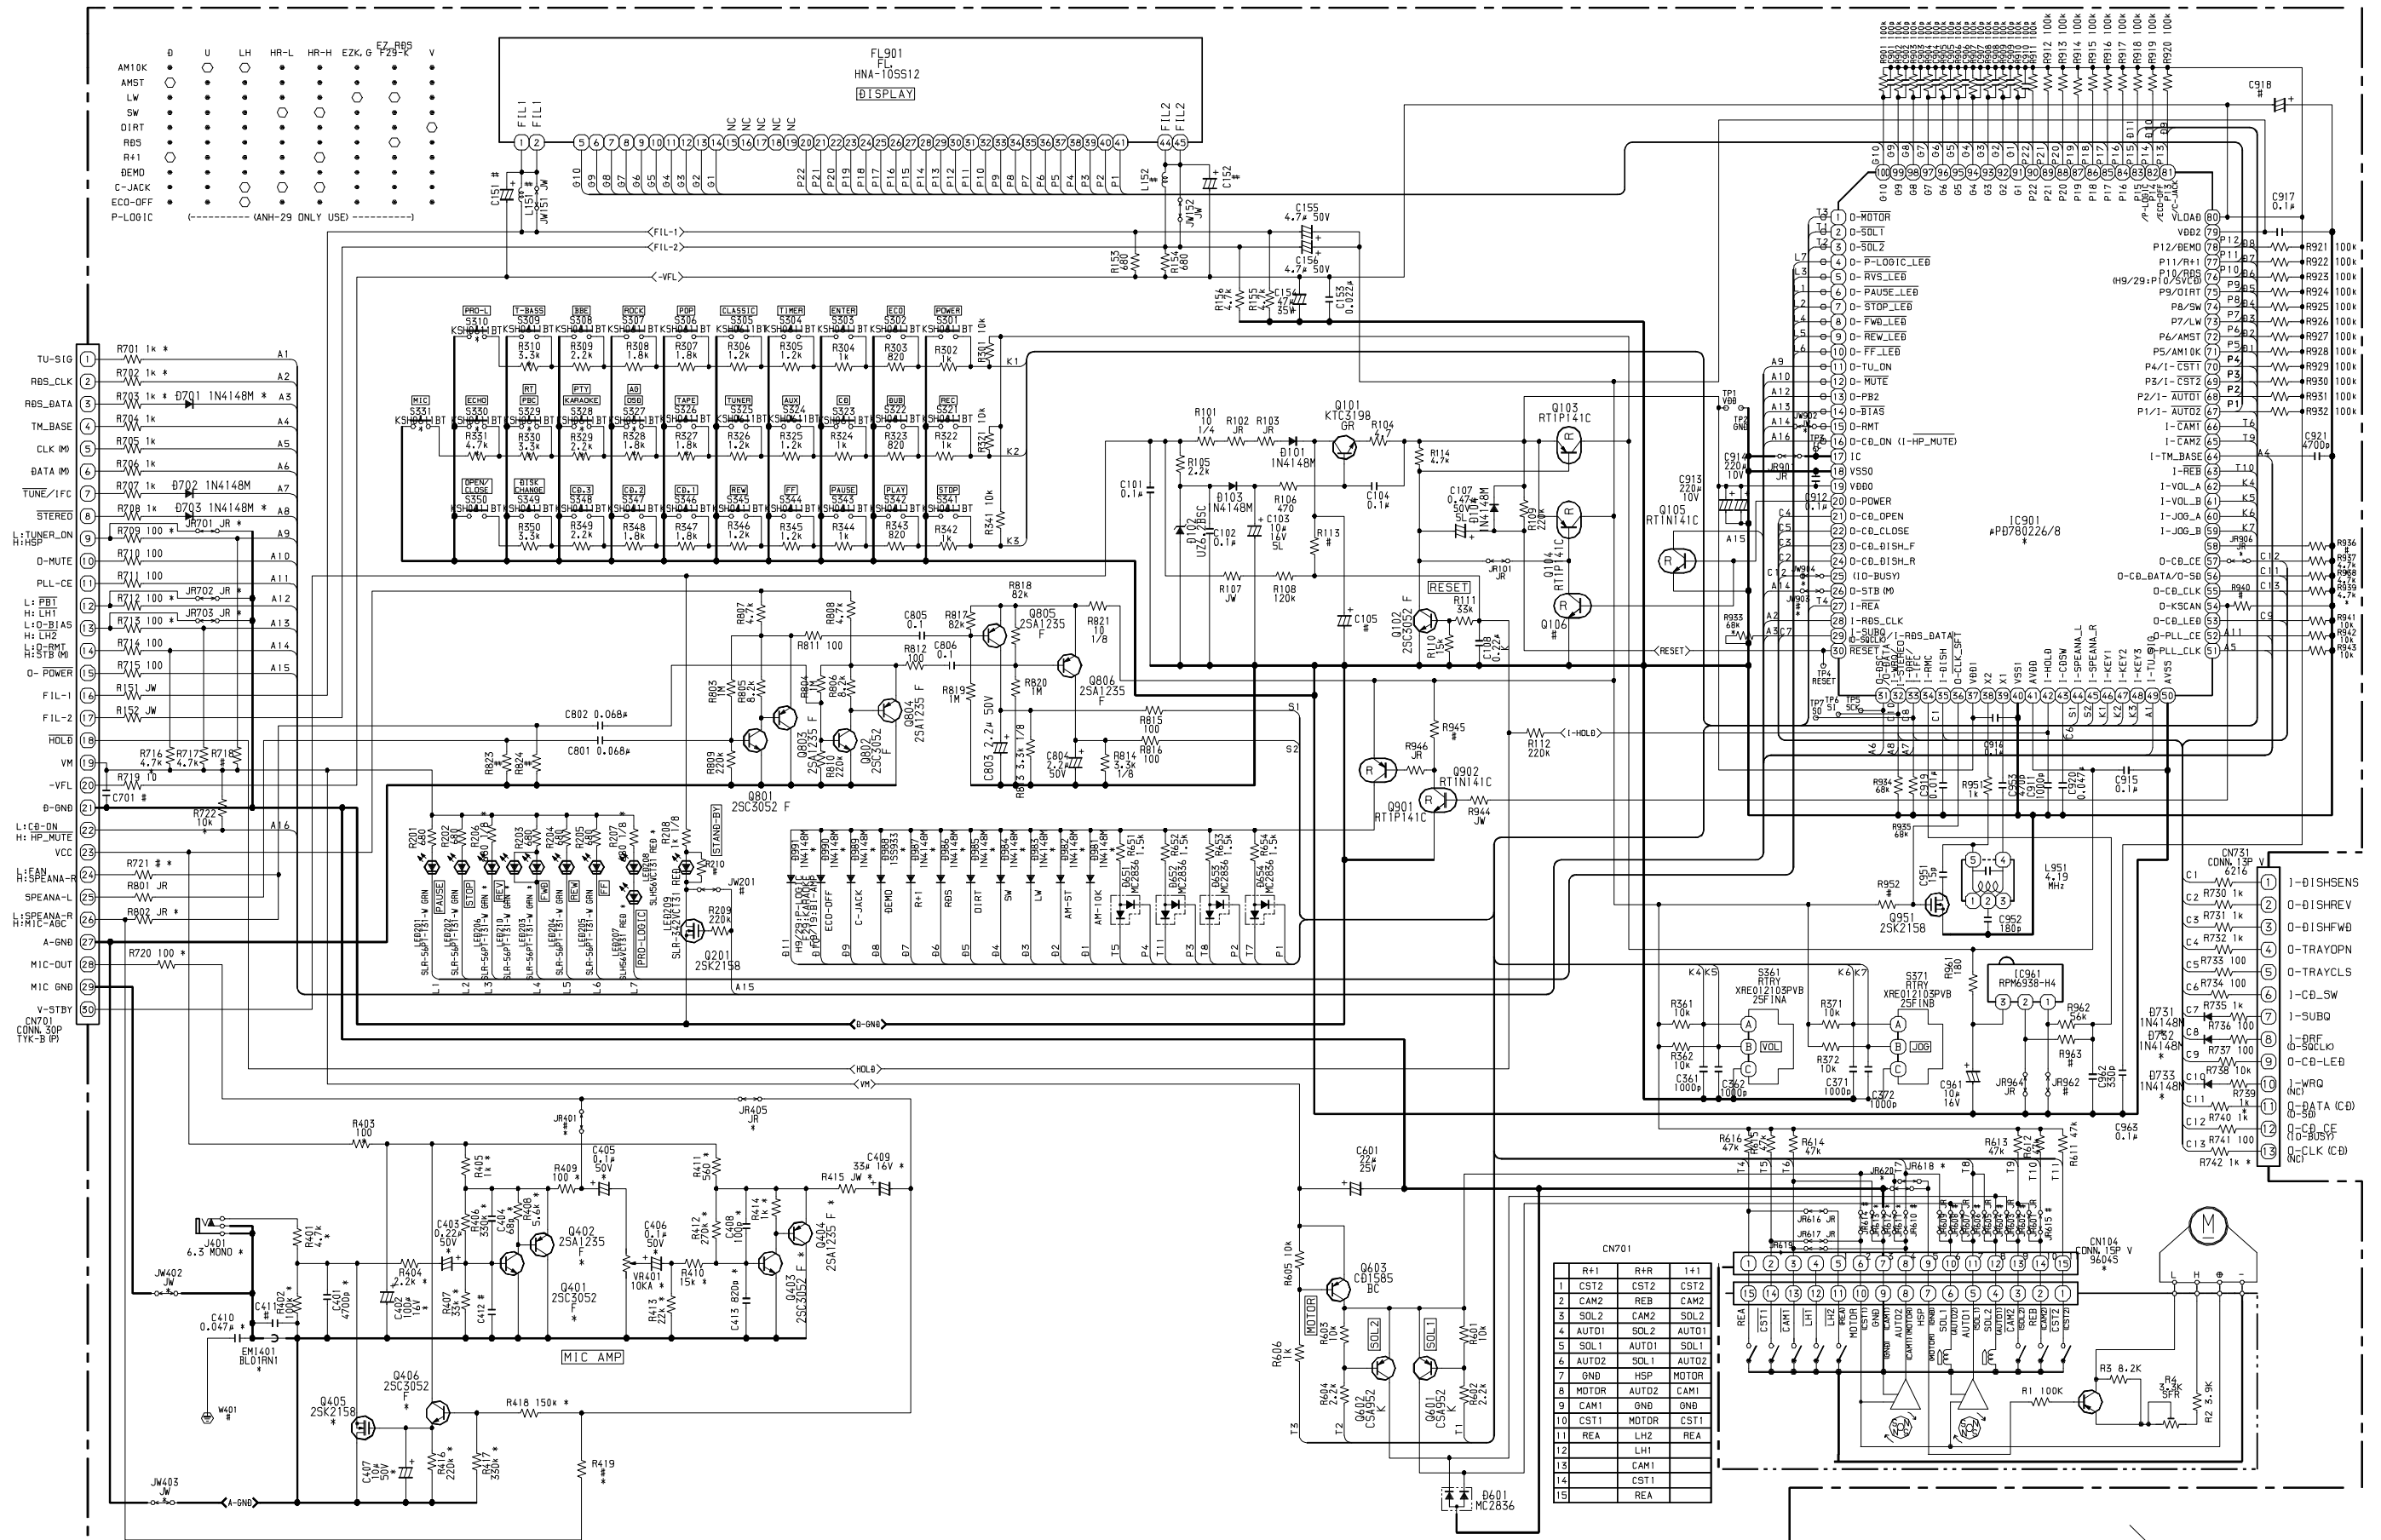

S. KURAMOTO S. KURAMOTO


SCHEMATIC DIAGRAM (FRONT)

BA NF9 620 01

ANF-9

14 OCT 1999

SCHEMATIC DIAGRAM – 4 (PT : U)

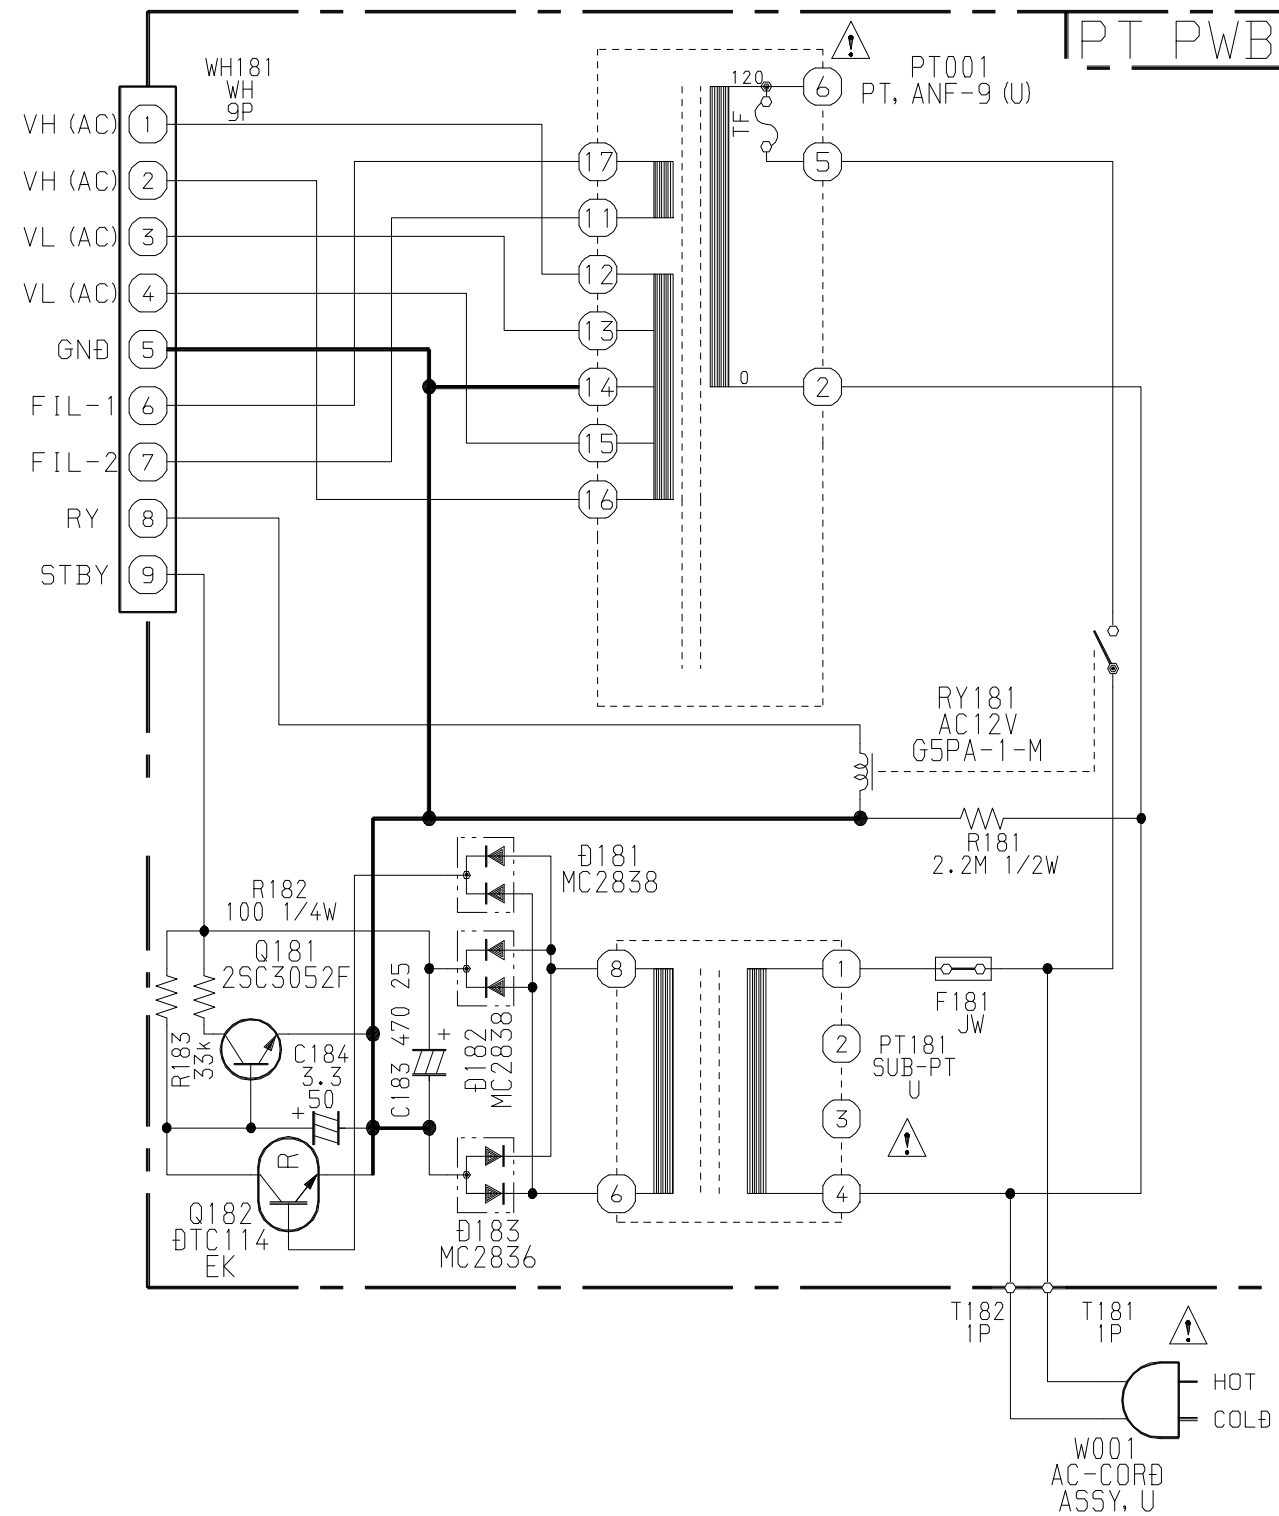


H. ISOYAMA, H. ISOYAMA
(PT)
SCHEMATIC DIAGRAM

ANF-9

20 OCT 1999

SCHEMATIC DIAGRAM – 5 (PT : LH)

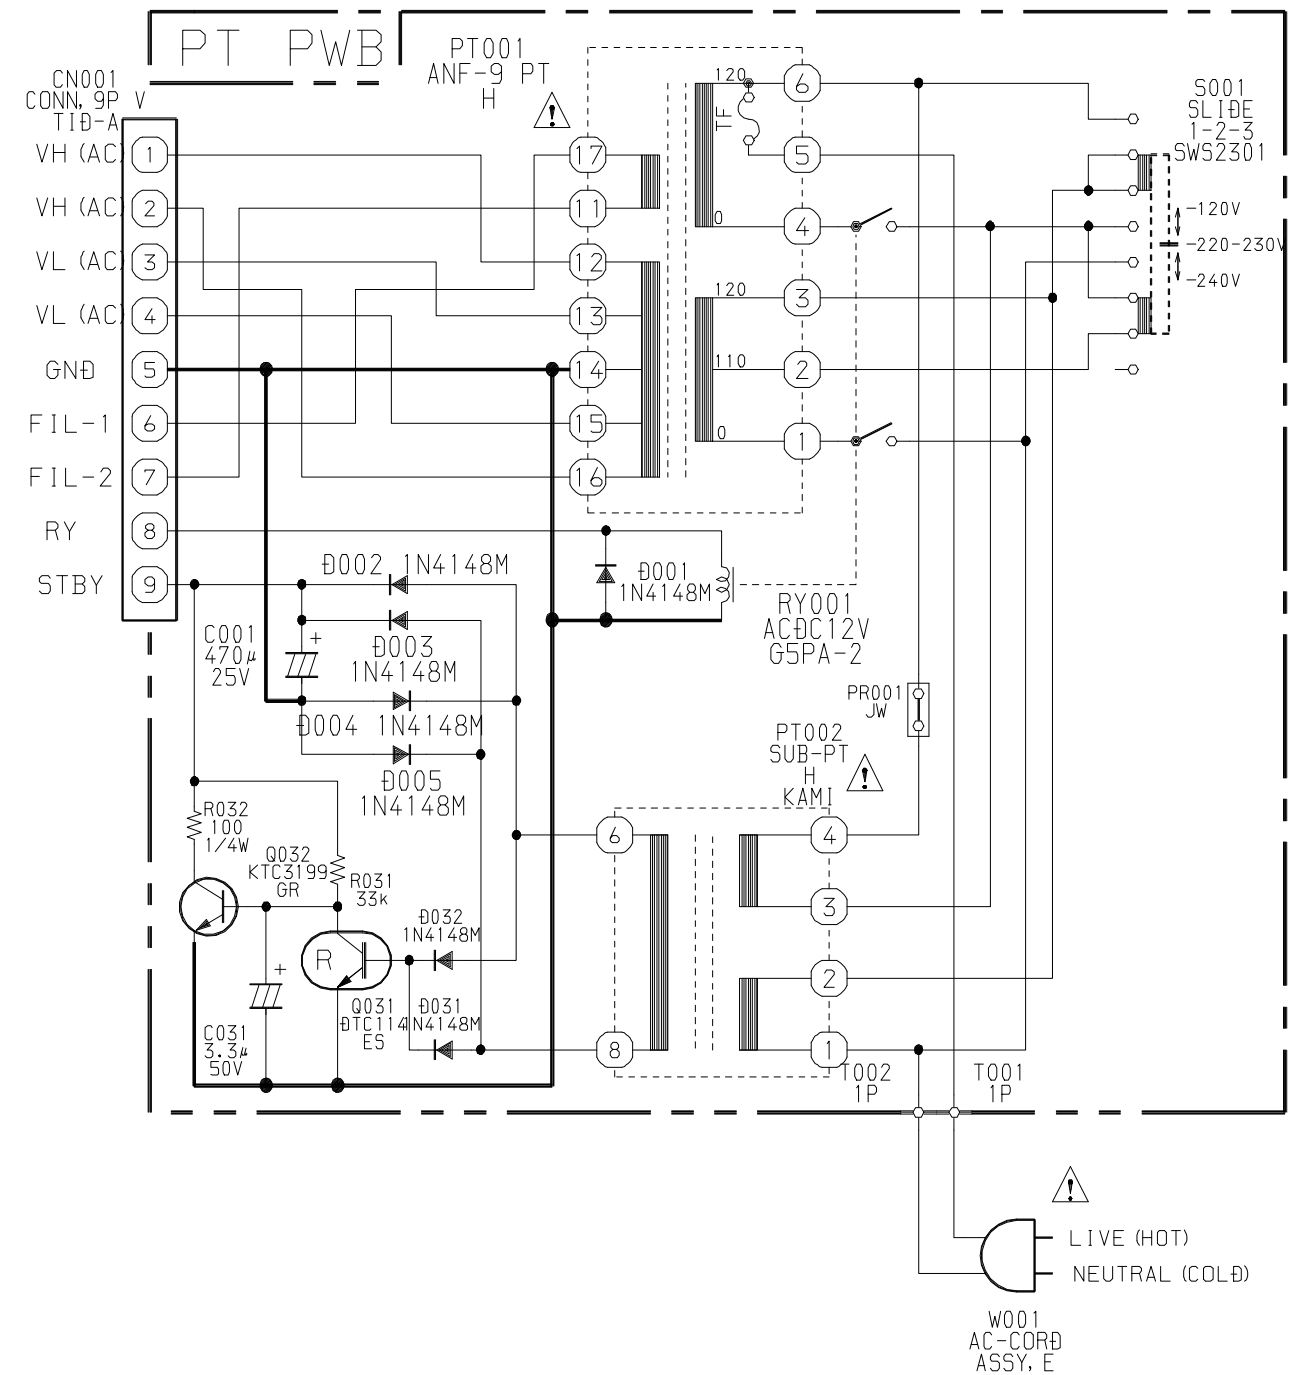

H. ISOYAMA, H. ISOYAMA
(PT)
SCHEMATIC DIAGRAM

ANF-9HE/HR

13 AUG 1999

アイワ株式会社 〒110-8710 東京都台東区池之端1-2-11 ☎03(3827)3111 (代表)
AIWA CO.,LTD. 2-11, IKENOHATA 1-CHOME, TAITO-KU, TOKYO 110, JAPAN TEL:03 (3827) 3111